Bathroom Taps

















Description

Shower column with mixer taps and satin stainless steel structure. Integrated shower head, hand shower support to the column or at wall, hand shower, additional "JOY" hand shower and integrated fixed jet for the lumbar area. With connections of 1/2 "and with a distance of 150mm between them, it includes a non-return valve, the flow rate at 3 bar of the hand shower is 9 l/ min, the shower head 11 l/ min and the jets 11 l/ min.

LAUS


Finish



satin stainless steel 100130514

Flow rate diagramme


Pressure (bar)	0	2	3	4	5
Flow - Jet (I/min) (±15%)	0	8	11	12	13.5
Flow - Handshower (I/min) (±15%)	0	8	9	9	9
Flow - Rain (I/min) (±15%)	0	9	11	12.5	13.5

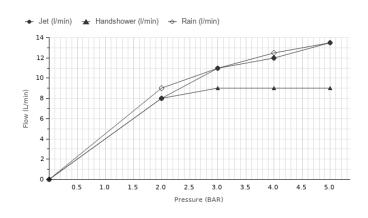

Technical drawing









Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.