

Rain Showers



LOUNGE

Designed by
SIMONE MICHELI

Description

60cm concealed ceiling shower head. Shower modes: rain shower, waterfall and laminar spray. Additional function: chromotherapy. Remote control for chromotherapy included. IP67 protection. 110-230 V power supply. Shower valve not included. A 3 exit shower valve with minimum flowrate of 21l/min for waterfall function and 16l/min for rain and laminar spray function is required.

Finish




polished stainless steel
100165569

Flow rate diagramme


Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Outlet elbow (l/min) (±15%)	0	12	13.2	14.8	15	15	15
Flow - Diverter (l/min) (±15%)	0	10	15.6	20.5	24.7	28.8	32.8
Flow - Mixer (l/min) (±15%)	0	12	13.2	14.8	15	15	15

◆ Outlet elbow (l/min) ▲ Diverter (l/min) ⇨ Mixer (l/min)

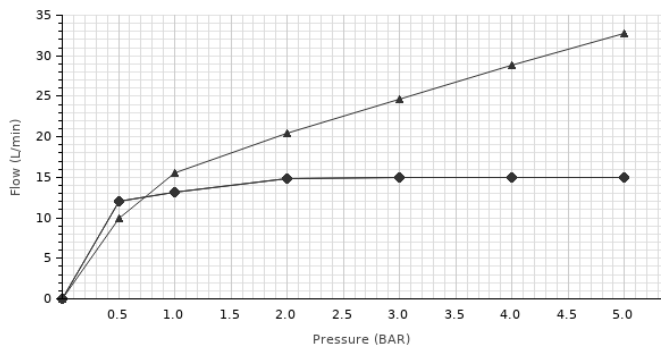

Technical drawing

Dimensions in mm

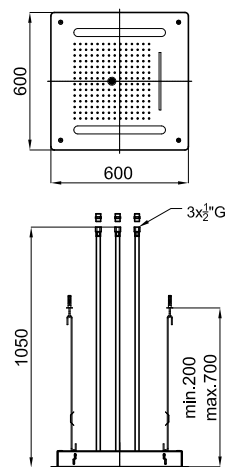

noken
PORCELANOSA BATHROOMS

Warranty: For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2022 noken | Edition: 03/04/2022 INT Ref.100045