



# LOUNGE

Designed by  
**SIMONE MICHELI**

## Description

40x60cm concealed ceiling shower head. Shower modes: rain shower, waterfall and laminar spray. Additional function: chromotherapy. Remote control for chromotherapy included. IP67 protection. 110-230 V power supply. Shower valve not included. A 3 exit shower valve with minimum flowrate of 21l/min for waterfall function and 16l/min for rain and laminar spray function is required.

## Finish




polished stainless steel  
100165589

## Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Outlet elbow (l/min) (±15%)	0	11.5	13	14.8	15	15	15
Flow - Diverter (l/min) (±15%)	0	10.5	15.6	20.5	24.7	28.8	32.8
Flow - Mixer (l/min) (±15%)	0	12	13.5	15	15	15	15

◆ Outlet elbow (l/min) ▲ Diverter (l/min) ⇌ Mixer (l/min)

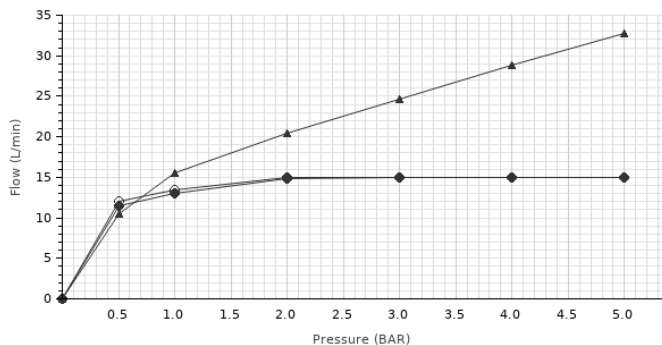

## Technical drawing

Dimensions in mm

