


Bathroom Taps

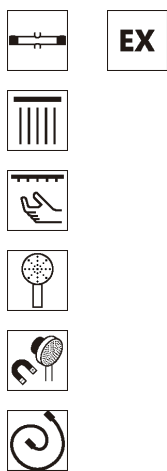

# TONO

Designed by  
**FOSTER + PARTNERS**

Description

Thermostatic shower column with built-in wax thermoelement, shower head, magnetic bracket and magnetic hand shower. Connections of 1/2" and a distance of 150 mm between them. It includes a non-return valve and safety stop at 38°. The flow rate at 3 bar of the hand shower is 5,7l/min and of the shower head 7,6 l/min.


Finish



chrome  
100220153


Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Handshower (l/min) (±15%)	0	2.6	3.9	5.4	5.7	5.8	6
Flow - Shower head (l/min) (±15%)	0	3.7	5.5	6.7	7.6	8.3	8.3

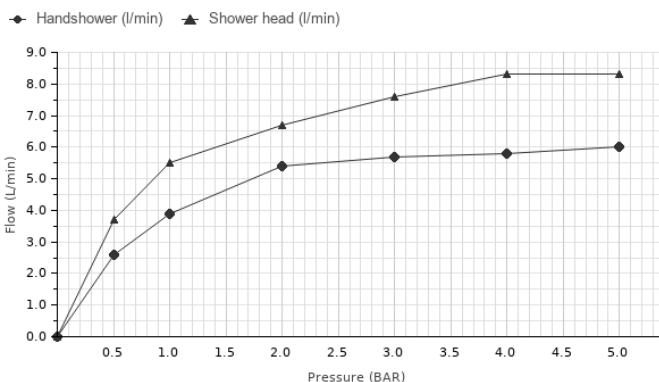

Technical drawing

Dimensions in mm

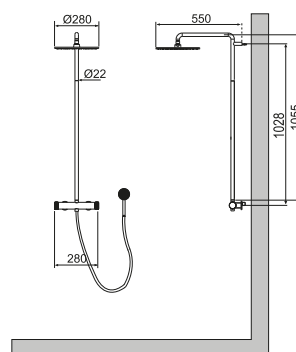

**noken**  
PORCELANOSA BATHROOMS

Warranty: For a warranty or other information on this product, visit our Web address: [www.porcelanosa.com](http://www.porcelanosa.com)

Legal disclaimer: All details provided by the PORCELANOSA GROUP's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. PORCELANOSA GROUP reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2022 Porcelanosa Grupo | Edition: 03/04/2022 INT Ref.105034 Foster+Partners