

Rain Showers



SQUARE

Description

40cm concealed ceiling shower head. Shower modes: rain shower and waterfall. Additional function: chromotherapy. Remote control for chromotherapy included. IP67 protection. 110-230V power supply. Shower valve not included. A 2 exit shower valve with minimum flowrate of 21l/min for waterfall function and 16l/min for rain and laminar spray function is required.


Finish



polished stainless steel
100259027

Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Rain (l/min) (±15%)	0	10.7	14	14	14.3	14.5	15.7
Flow - Waterfall (l/min) (±15%)	0	12.3	17.3	19.5	20.2	20.3	20.4

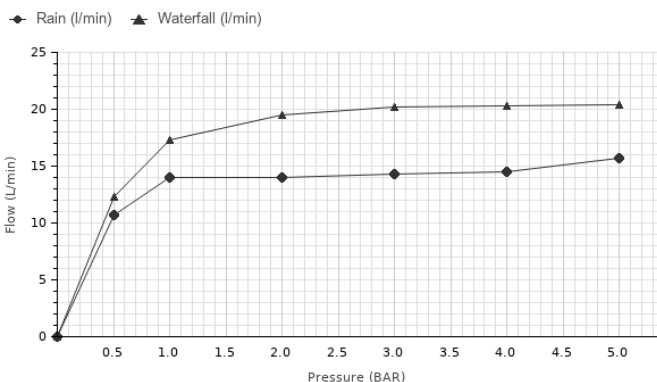

Technical drawing

Dimensions in mm

