Bathroom Taps



















Description

T&F ROUND - Thermostatic shower column with built-in wax thermoelement, glass shelf, shower head, slider hand shower bracket and multifunction hand shower. Connections of 1/2 "and a distance of 150 mm between them. It includes a non-return valve and safety stop at 38°. The flow rate at 3 bar of the hand shower is 7,5l/min and of the shower head 8,25 l/min.

TOUCH&FEEL

Finish



Matt black 100291204


Other Finishes



chrome 100291205


Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Handshower (I/min) (±15%)	0	2.5	4	6.1	7.5	7.9	8
Flow - Rain (I/min) (±15%)	0	2.9	4.9	7	8.3	8.8	9.2

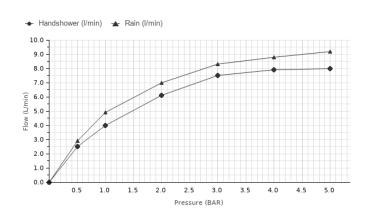

Technical drawing





Dimensions in mm



Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.