










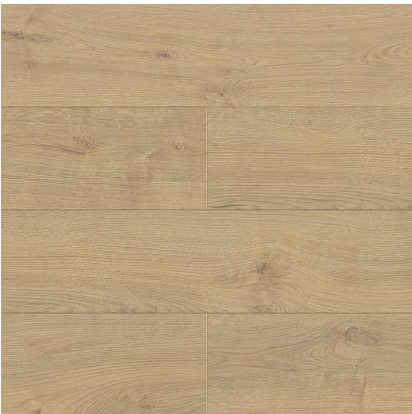







Model: AC6 NATURAL 1L MICHIGAN CLEAR
Codes: 100244078
Group: G-213
Format: 19,3X128,2



| COMPOSITION | | | | |
|-----------------------------------------------------------------------------------|---------|------|------------------|--------------------------------------------------------|
|  | | Size | Material | Type of material |
| | Layer 1 | 0.2 | Melamine | Aminoplastic thermosetting resins |
| | Layer 2 | 0.2 | Decorative paper | |
| | Layer 3 | 7.5 | HDF | High-density Fiber Board and water-repellent glues |
| | Layer 4 | 0.1 | Backside | Sheets of kraft paper impregnated with phenolic resins |

| CERTIFICATIONS | | |
|--------------------|--------------------------|--|
| Carb certification | CARB: Phase II compliant | |

| FEATURES | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  Imitates the surface of wood |  Beveled cut on all 4 edges of the board for emphasizing size |
|  Gloss-free |  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece. |
|  5 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329. |  25 25 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329. |
|  Format where only one board has been used to finish the entire base surface |  Is suitable for installing on water radiant heating |
|  Floor capable of dissipating excess electrical charges and distribute them over its entire surface |  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests |
|  It is one of the easiest to install and safest systems in the market. We just need to adjust the board to be installed longitudinally to the one already placed, by applying a soft pressure without the need for any type of tool. Both pieces will fit and will be secured thanks to the safety tab. It is just as simple to take apart, which makes for a quick disassembly |  23. Intensive residential |
|  33. Intensive commercial |  AC6 Abrasion resistance level according to UNE-EN 13329. |
|  Suitable for bathroom and kitchen floors for residential use, provided that the product's installation instructions are always followed. | |



| DIMENSIONAL FEATURES | | |
|----------------------------------------------------------------|------------------------------------------------------------------|-------------------|
| Item thickness | ±0.1 MM | EN 13329* |
| Length of face | ±0.5 MM | EN 13329* |
| Width of face | ±0.1 MM | EN 13329* |
| Squareness of the item (q) | ≤0.20 mm | EN 13329* |
| Straightness of face | ≤0.30 mm/m | EN 13329* |
| Flatness of item (f) | fw,Cóncavo≤0.50% fw,Convexo≤1%/fl,Cóncavo≤0.15% fl,Convexo≤0.20% | EN 13329* |
| Joint between items | ≤0.20 mm | EN 13329* |
| Difference in height among items | ≤0.15 mm | EN 13329* |
| Dimensional variations related to changes in relative moisture | ≤0.90 mm | EN 13329* |
| Uv light fastness | ≥4 | EN 438-2,16* |
| Punching | No visible changes | EN 433* |
| Surface stripping | ≥1.00 N/mm2 | EN 13329 Anexo D* |

| LABORATORY TESTS | | |
|-------------------------------------------------------------------|-----------------------------------|--------------------|
| Resistance to abrasion | AC6 | UNE EN 13329:2000* |
| Impact resistance | ≥1000 mm/≥15 N | EN 13329* |
| Resistance to staining | Grado 5 (G 1 y 2) y Grado 4 (G 3) | EN 438* |
| Resistance to cigarette burns | 4 | EN 438* |
| Furniture leg effect | No damage | EN 424* |
| Castor chair effect | No damage | EN 425* |
| Swelling in thickness | ≤8% | EN 13329* |
| Resistance to microscratching | Class 1 | EN 16094* |
| Formaldehyde emissions | E1 | EN 717* |
| Slip resistance (pendulum-wet) | CL 1 (29) | UNE 41901* |
| Fire resistance | Cfl-s1 | EN 13501* |
| Evaluation of propensity to accumulation of electrostatic charges | ≤2 kV | EN 1815* |
| Heat resistance | R=0.065 m2 K/W | ISO 8302* |
| Swelling in thickness | ≤18% | ASTM D 1037* |
| Slip resistance (dcof) | 0.60 | ANSI A137.1* |
| Critical radiant flux | Clase 1 | ASTM E 648* |
| Smoke density (burning) | <450 Dmc | ASTM E 662* |
| Density of the board | 950 ±5 KG/M3 | UNE EN 323* |
| Slip resistance (pendulum-dry) | CL 2 (42) | UNE 41902* |

| PACKING | | |
|------------------------------|-------------------|--|
| Sales units per box | 1.979408 M2/BOX | |
| Sales units per pallet | 102.929215 M2/PAL | |
| Sales units per unit | 0.247426 M2/PIECE | |
| Sale unit | M2 | |
| Base unit | ST | |
| Sales units per square meter | 1 M2 | |
| Net weight | 7.933685 KG/M2 | |
| Gross weight | 8.147891 KG/M2 | |

| SPECIAL PIECES | | | | | | | | | |
|----------------|------------------------------------------|-------|---------------|-----------------|----------------|-----|------------|----------------|----------------|
| SAP | Description | Group | Boxes | Pallet | Units | SKU | Basic Unit | Net Weight | Gross weight |
| 100173949 | IGUALACION NATURAL 1L MICHIGAN CLEAR 270 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.77 KG/PIECES | 0.8 KG/PIECES |
| 100244800 | MAMPERLAN AC6 NATURAL 1L MICHIGAN CLEAR | G-163 | 2 PIECES/BOX | 200 PIECES/PAL | 11.9 PIECES/M2 | - | - | 1.58 KG/PIECES | 1.64 KG/PIECES |
| 100173981 | TRANSICION NATURAL 1L MICHIGAN CLEAR 270 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.77 KG/PIECES | 0.8 KG/PIECES |
| 100156444 | ZOCALO NATURAL MICHIGAN CLEAR 8X220X1,5 | G-107 | 14 PIECES/BOX | 560 PIECES/PAL | 5.68 PIECES/M2 | - | - | 1.8 KG/PIECES | 1.86 KG/PIECES |

