


Model: AC5 CROSS CHEVRON NATURAL

Codes: 100313980

Group: G-219

Format: 29,34X118,4X0,8

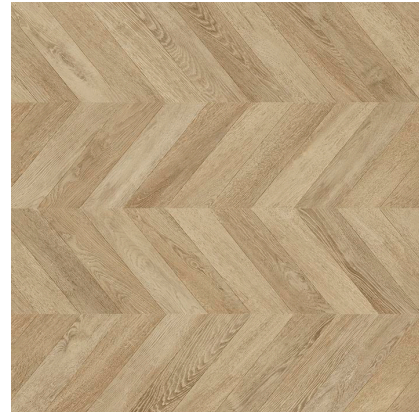

COMPOSITION
















| | Size | Material | Type of material |
|---------|------|------------------|----------------------|
| Layer 1 | 0.06 | Overlay | |
| Layer 2 | 0.1 | Decorative paper | |
| Layer 3 | 7.7 | HDF Extreme | |
| Layer 4 | 0.14 | Backside | Kraft counterbalance |

ADDITIONAL NOTES

High resistance to water and moisture as long as the instructions for installation of this product for these cases are followed.

FEATURES

-  Imitates the surface of wood
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Floor capable of dissipating excess electrical charges and distribute them over its entire surface
-  Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly.
-  33. Intensive commercial
-  Suitable for bathroom and kitchen floors for residential use, provided that the product's installation instructions are always followed.
-  Gloss-free
-  25 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Is suitable for installing on water radiant heating
-  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  23. Intensive residential
-  ACS Abrasion-resistance level as per Standard UNE-EN 13329

DIMENSIONAL FEATURES

| | | |
|-------------------|------------------------------|--------------------|
| Item thickness | ≤0.50 del valor nominal MM | UNE EN 13329:2016* |
| Length of face | ≤1500: Δl≤0.5 mm | UNE EN 13329:2016* |
| Uv light fastness | ≥Grado 4 en escala de grises | EN 20105-A02* |



LABORATORY TESTS

| | | |
|---|-----------------------|----------------------|
| Resistance to abrasion | AC5 | UNE EN 13329:2000* |
| Impact resistance | CLASE IC3 | EN13329 tabla 2* |
| Resistance to staining | Grupo 1-2≥5/Grupo 3≥4 | EN-438-2 / EN 13329* |
| Swelling in thickness | ≤10% | EN 13329* |
| Formaldehyde emissions | E1 | EN 717-2* |
| Slip resistance (pendulum-wet) | CL 1 (27) | UNE 41901* |
| Tensile strength of joints | F≥1 kN/ml | EN 13329* |
| Fire resistance | Bfl-s1 | EN 13501* |
| Evaluation of propensity to accumulation of electrostatic charges | ≤2 kV | EN 1815* |
| Residual footprint | ≤5 MM | EN ISO 24343-1* |
| Acoustic insulation | ΔLw=17 dB | ISO 10140* |
| Slip resistance (dcof) | 0.60 | ANSI A137.1* |
| Density of the board | 940 ±5 KG/M3 | UNE EN 323* |
| Slip resistance (pendulum-dry) | CL 3 (52) | UNE 41902* |

PACKING

| | |
|------------------------------|-------------------|
| Sales units per box | 2.084314 M2/BOX |
| Sales units per pallet | 106.299991 M2/PAL |
| Sales units per unit | 0.347386 M2/PIECE |
| Sale unit | M2 |
| Base unit | ST |
| Sales units per square meter | 1 M2 |
| Net weight | 8.900772 KG/M2 |
| Gross weight | 9.358477 KG/M2 |

SPECIAL PIECES

| SAP | Description | Group | Boxes | Pallet | Units | SKU | Basic Unit | Net Weight | Gross weight |
|-----------|---|-------|---------------|-----------------|----------------|-----|------------|----------------|----------------|
| 100313918 | IGUALACION CROSS CHEVRON NATURAL 4X270X1 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.7 KG/PIECES | 0.72 KG/PIECES |
| 100313961 | MAMPERLAN AC5 CROSS CHEVRON NATURAL 7X120 | G-163 | 2 PIECES/BOX | 200 PIECES/PAL | 11.9 PIECES/M2 | - | - | 1.58 KG/PIECES | 1.64 KG/PIECES |
| 100313919 | TRANSICION CROSS CHEVRON NATURAL 4X270X1 | G-155 | 20 PIECES/BOX | 1000 PIECES/PAL | 9.26 PIECES/M2 | - | - | 0.7 KG/PIECES | 0.72 KG/PIECES |
| 100313982 | ZOCALO CROSS CHEVRON NATURAL 8X220X1,5 | G-107 | 14 PIECES/BOX | 560 PIECES/PAL | 5.68 PIECES/M2 | - | - | 1.8 KG/PIECES | 1.86 KG/PIECES |

